Reinventing Spaces



WOVEN DESIGN FLOORING

Designed and Manufactured by NOX Corporation

Design Center & Office

KD Center, 355, Hyoryeong-ro, Seocho-gu, Seoul, 06643 Kore Tel +82-2-520-7600 Fax +82-2-598-9674 www.noxglobal.com E-mail info@noxglobal.com

NOX Corp. | KOREA

Shinho Factory
Shinho 2nd Factory, Yedang
Enbo Factory
Godeok Factory
Bongsan Factory
Deoksan Factory
Choongnam Korea

NOX US | USA


NOX US P.O. Box 824 931 S. Springville Avenue Fostoria, OH 44830 Office +01-419-701-5060 Fax +01-419-701-5058

HERRINGBONE

Classic & Cozy





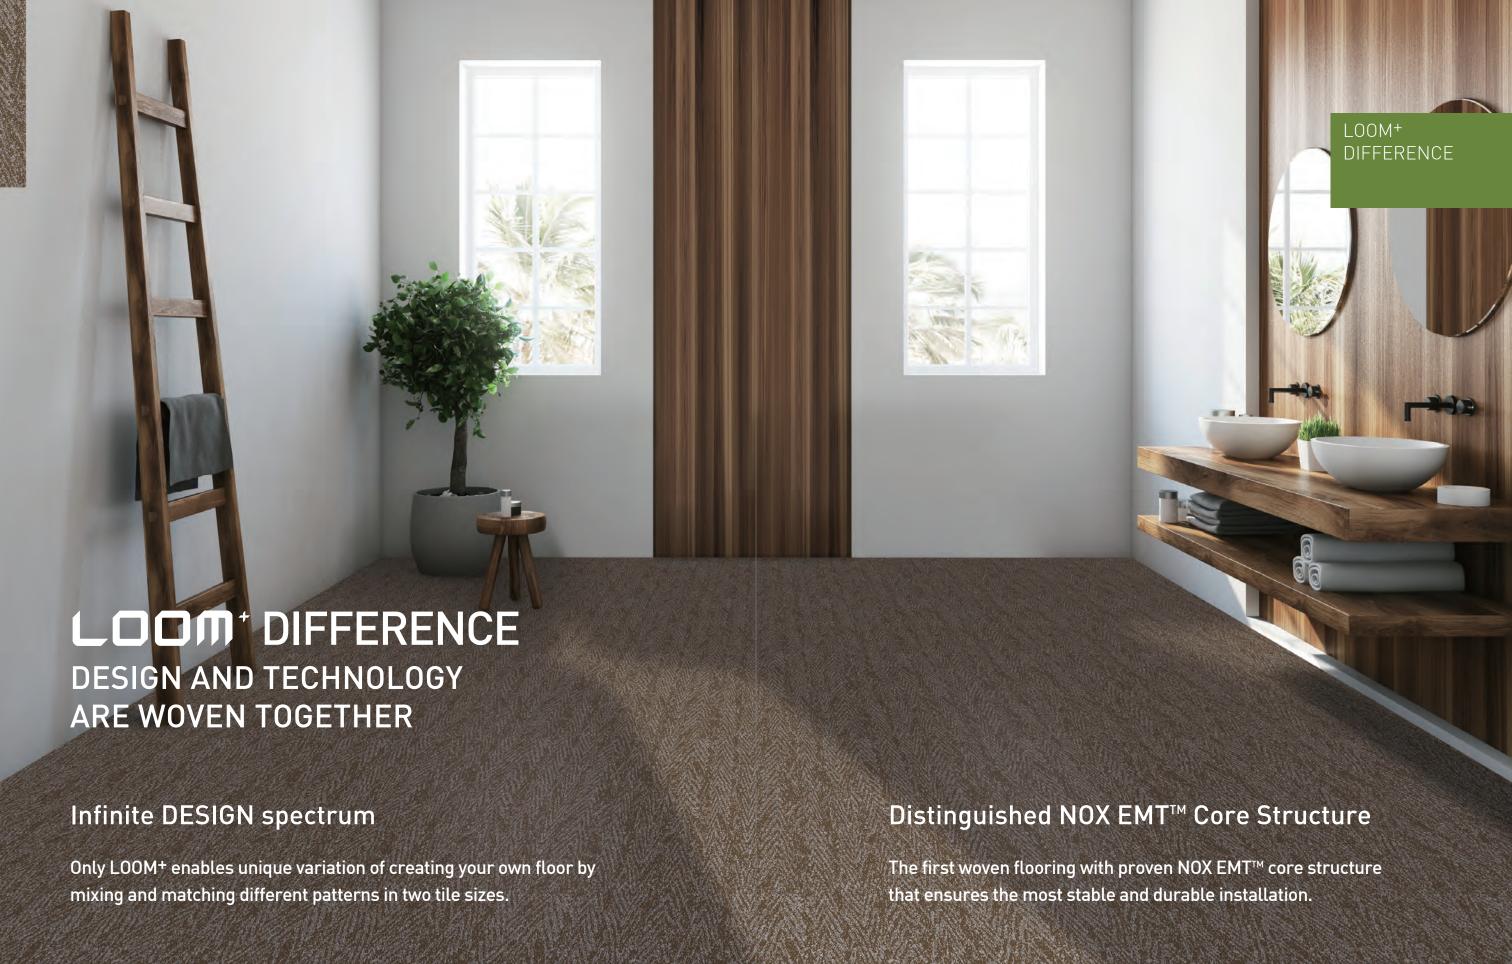

LOOM* DESIGN

PLAY with COLOR, SIZE and TEXTURE



Profound Color Composition

Realizing multiple tones of color - carefully selected by artists - we provide you with very unique colors that expresses LOOM+ in harmony with surrounding interiors.



Infinite array of color and texture

Available in 59 colors covering diverse tones like neutral, cool, warm, light, and dark in five different yarn thicknesses, we give you nine unique design patterns.



Designed for mix & match

Creative and unique 'mix & match' only by LOOM+ is realized by introducing the same weaving system to nine design patterns.



Standard size

50x50cm 25x100cm Plank size

Optimal 2 Size variation

With our unique 2 module sizes of 50cm×50cm and 25cmx100cm, the first introduced in woven flooring market, you can elevate the flat environments to inspiring interior spaces.

LOOM* TECHNOLOGY

PROVEN INNOVATION



Distinguished NOX EMT[™] Core Structure

NOX EMT[™] core structure featured with innovative functionality and safety, proven in more than 50 countries over 20 years

- Clean & Tough





- + The first & only in woven flooring with NOX EPT™ shield treatment (Anti-Bacterial)
- + Strong enough for heavy commercial use

Dimensional Stability & Consistent Thickness

- + The most reliable NOX EMT™ core structure + Consistent product thickness by patterns for mix & match with different patterns



+ Clean-cut finishing for preventing fraying even when cutting tiles during installation



Children & Schools

IREENGUARD®

Indexer Air Quality Certified

Safe

Certified non-toxic, phthalate-free. and fiberglass-free



Quick

Quick and Easy ECOLAY® installation without glue



Easy

Minimal cleaning time and low maintenance



Colorfast

Non-Slip

Slip-resistance

Colorfast properties retain gorgeous original colors over time

with woven fabric surface










NOX Herringbone collection offers versatility using cool and warm natural accent tones to create artistic design and comfort in any room. Offered in our new 25cmx100cm plank format, providing a rustic appearance when installed in an ashlar paving pattern.



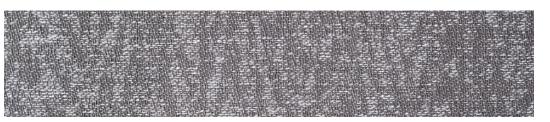

FQ-2502



FQ-2503



FQ-2504



FQ-2505



FQ-2506

08 / 09

Reinvent Spaces with

PLAY!


New 25cmx100cm MIXMATCH plank brings new proportion and scale to your flooring to create fresh and exciting designs. In addition to new MIXMATCH plank, LOOM+ modular system includes 50cmx50cm squares.

All work together in any combination, giving you the freedom to create your own design by mixing & matching different patterns and colors in 2 size variations.





NEW LOOM* PLAY!




LOOM PLAY #21




LOOM PLAY #26



LOOM PLAY #22



LOOM PLAY #27



LOOM PLAY #23




LOOM PLAY #24



LOOM PLAY #25

LOOM PLAY #30


INSTALLATION CONCEPT GUIDE

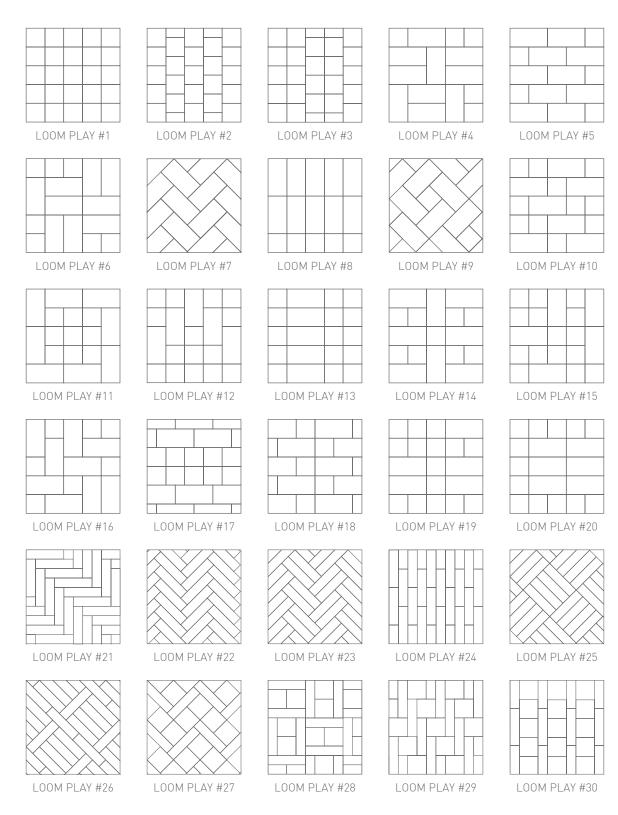



12 / 13

Restaurant Corporate

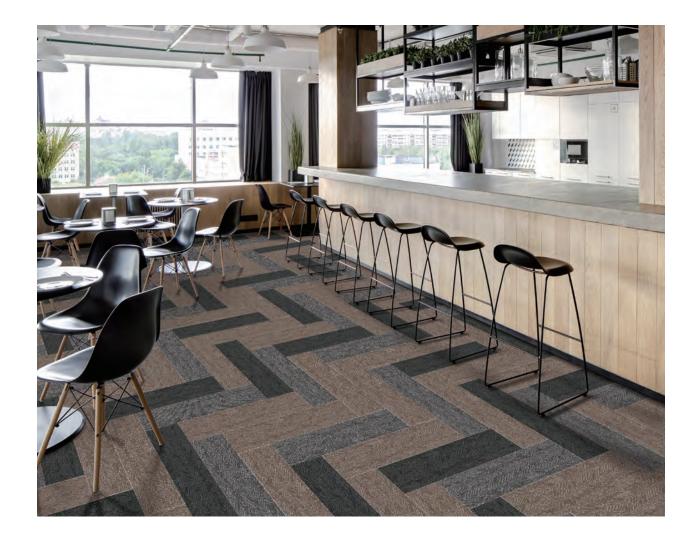










FQ-2502 FQ-2503 FQ-2505

Hospitality

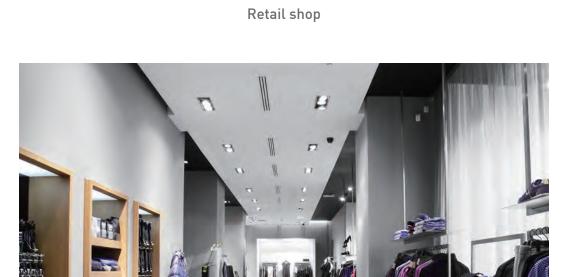







DL AV 404

FQ-2503

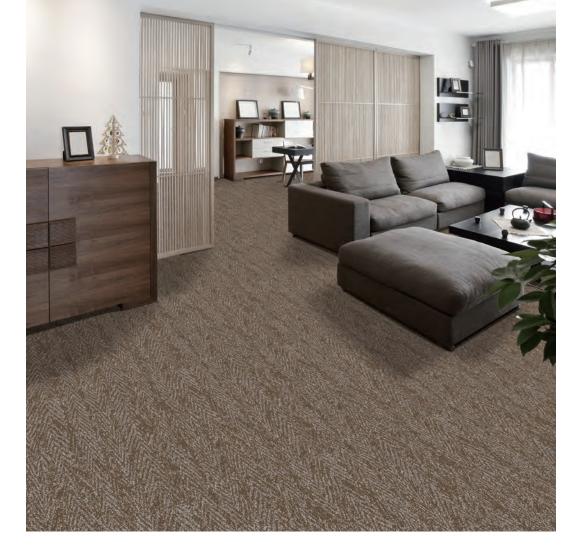





LOOM PLAY #24

Education & Libraries Healthcare



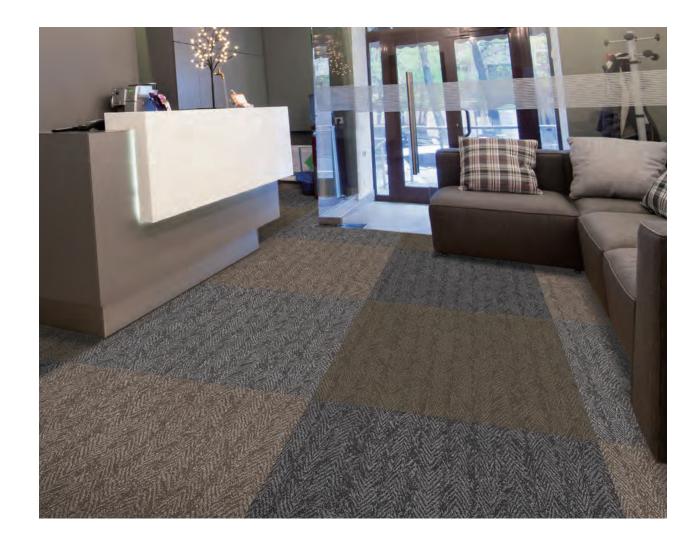




LOOM PLAY #27




FQ-2502 FQ-2503 FQ-2504 FQ-2505

FQ-2501 FQ-2502 FQ-2505 FQ-2506

Sports Center

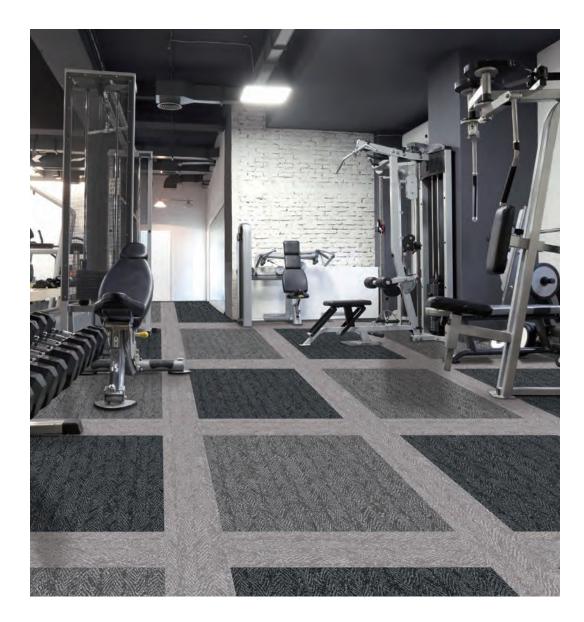



LOOM PLAY #26

FQ-2501 FQ-2502 FQ-2505

TECHNICAL INFORMATION

1. Size & Packing

Size(mm)	Thickness(mm)	Pcs/Box	m²/Box	Kg/m²
500x500	3	16 pcs/box	4 m²	5.0
	5	10 pcs/box	$2.5\mathrm{m}^2$	8.2
250x1000	3	10 pcs/box 16 pcs/box	4 m²	5.0
	5	10 pcs/box	$2.5\mathrm{m}^2$	8.2

2. Test Result

Test Item		Standard	LOOM+	
Level of use		EN 685	33	
Fraying	8	EN 1814	Frayproof	
Thermal resistance		ISO 8302	0.02m ² K/W	
Castor chair resistance		EN 985	No damage	
Dimensional stability		ISO 23999 EN 986	≤ 0.10% (Norm: ≤ 0.25%) Passed	
Fire resistance		EN 13501-1	Bfl -s1	
Indoor air quality			Low VOC (floor score certified)	
Underfloor heating		EN 12524	Suitable	
Light fastness	7	ISO 105-B02	≥ 6	
Slip resistance	TO DE	DIN 51130 EN 13893	R11 DS	
Flexibility		ISO 24344	Passed	
Impact sound insulation		ISO 10140-3	9dB	
Body Voltage		EN 1815	≤ 2KV	
Squareness & Straightness	7	ISO 24342 ASTM F2055	No deviation ≤ 0.01 in	
Residual indentation		ISO 24343-1 ASTM F1914	≤ 0.1mm < 8%	
Resistance to chemicals		ISO 26987 ASTM F925	No Defects No Defects	

3. Caution

Condition in at least 19°C or the normal temperature of the room where the product is to be laid, for at least 48 hours before installing. Cartons must be stacked less than 5 high and tiles removed 30 minutes before use. The site conditions must be maintained during installation and for at least 48 hours after completion. NOX Corporation will not accept claims where these instructions have not been followed.

4. Certificate



















Visit www.loomplus.com for the detailed installation / maintenance guides and technical information.